

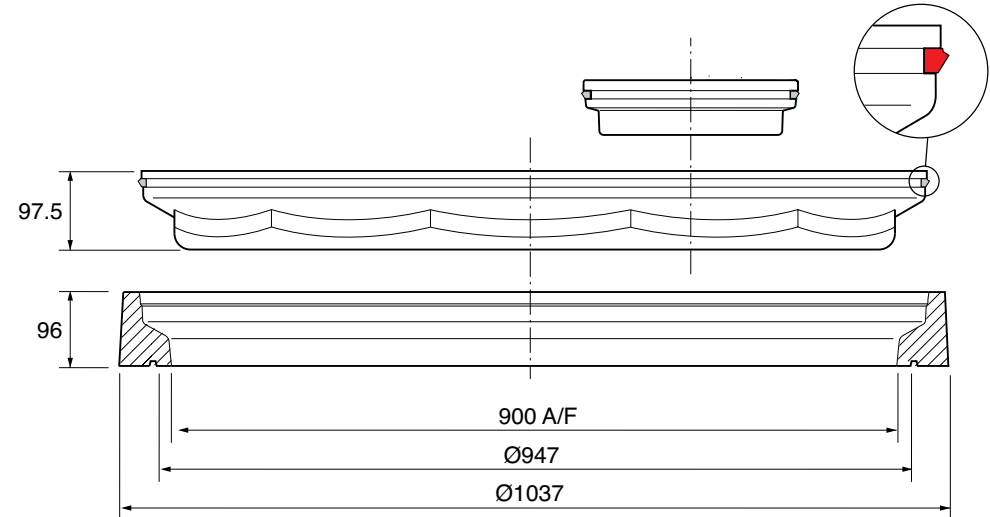


900mm dia. watertight flat sealed composite cover and frame, with offset dip port cover.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE 
PART OF OPW A  COMPANY

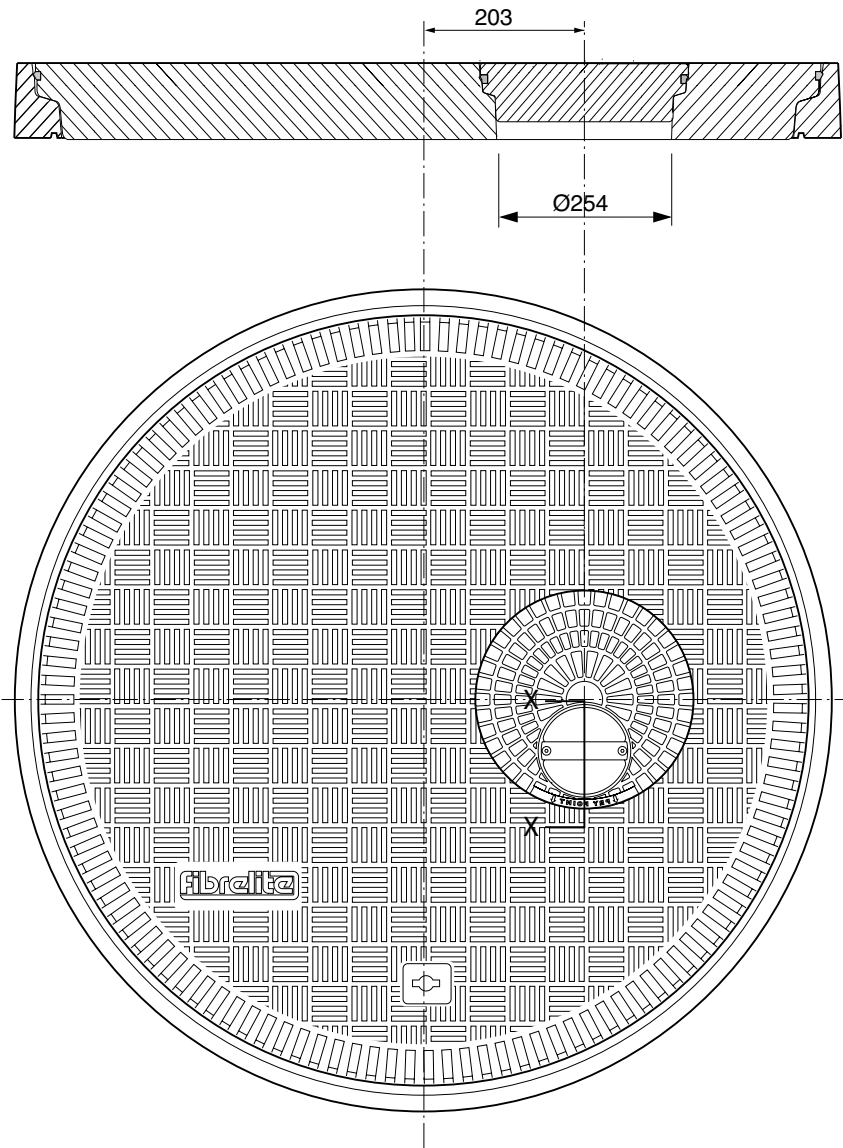

SECTION X - X
HANDLE BOWL

Load Rating	Cover Weight	Frame Weight	Port Cover
C250	38 kg	9.5 kg	3 kg
D400	48 kg	9.5 kg	3 kg

900mm dia. watertight flat sealed composite cover and frame, with offset dip port cover.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.




CONCRETE

VERY IMPORTANT

OUTER EDGE "A" OF FRAME SET 5 - 10mm ABOVE GENERAL FORECOURT AREA WITH CONCRETE RAMPED AWAY OVER 300mm



VERY IMPORTANT
The underside of the frame must be adequately supported by concrete.

Expansion joint filled with petrol resistant mastic

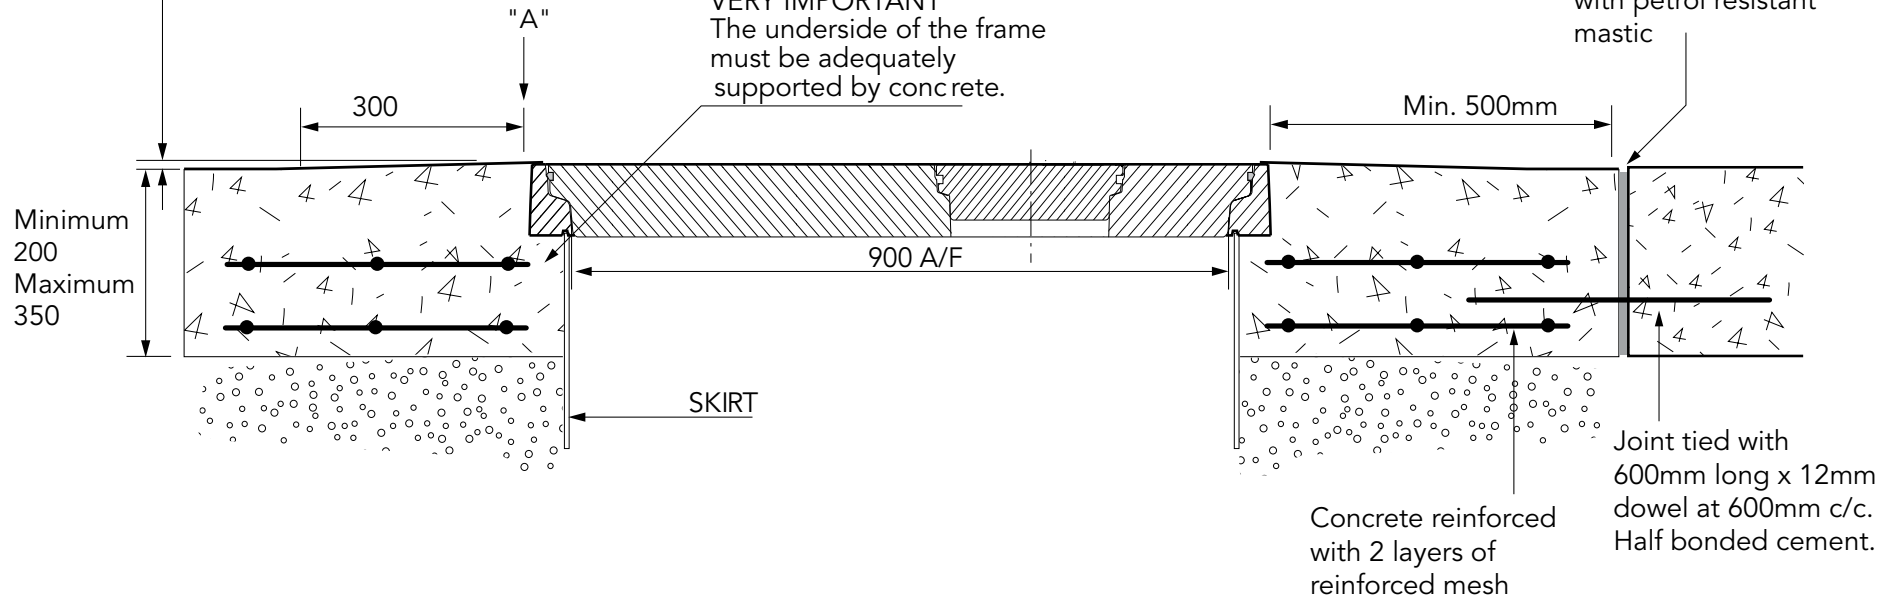

BLACKTOP

(THICKNESS AS SPECIFIED)

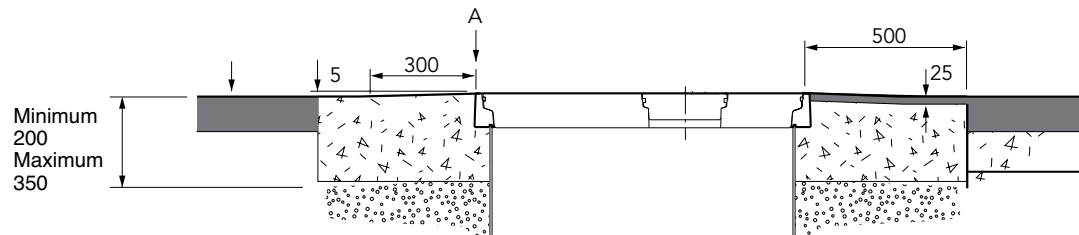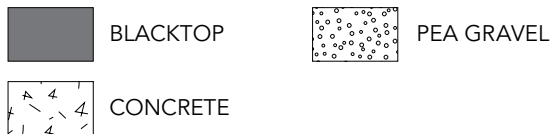

900mm dia. watertight flat sealed composite cover and frame, with offset dip port cover.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

