
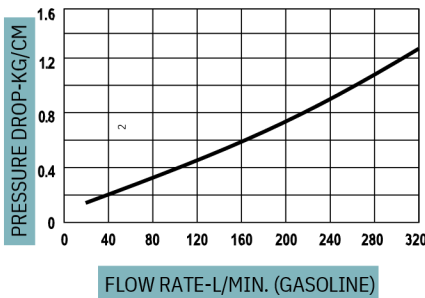


OPW 295AF
Aircraft Nozzles
For Overwing Aircraft Service

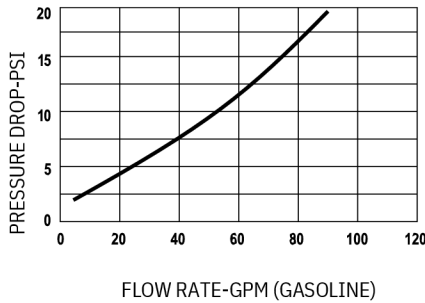

Replacement Parts

Part #	Description
153AF-0100	100 Mesh Strainer Ground
190WF-8002	Wire S/A w/ Dust Cap
C03420AG	Protector Ring
C03422	Dust Cap 1 1/2" Aluminum
297AF-9070	Spout for 295AF
E00274AG	Arctic Guard for 295AF

Materials

Body: Cast aluminum
Main Stem: Stainless steel
Stem Seal: Buna-N O-Ring
 Main Poppet Disc: Viton®
 Spout: 297AF-9070



Features

- ◆ Aluminum Body – lighter weight, easier to maneuver.
- ◆ Dual Poppets – easy-to-open nozzle against high inlet pressures.
- ◆ Replaceable Lever Guard – easy, low-cost replacement.
- ◆ Right Angle Design – provides larger lever area for better grip and easier control.
- ◆ Vinyl-Coated Lever – insulates fingers against cold.
- ◆ 100 Mesh Strainer – prevents foreign matter from entering fuel tank; easy to remove and clean.
- ◆ Dust Cap – keeps spout free from dirt and stops fuel drippage when connected.
- ◆ Spout Protector Ring – to protect aircraft tanks and wing surface; adjustable. Furnished as standard.
- ◆ Special Heavy-Duty Spout – knurled to facilitate daily strainer service.
- ◆ NPT Female Threads at Inlet End – standard pipe threads all 1-1/2" male connections.
- ◆ Static Ground Wire – with air force plug meets MS 25384-5.
- ◆ Dash-Pot Action – for smoother closing action and reduced line shock.

Design working pressure

- ◆ 110 psi (7.58 bar) maximum pressure

Ordering Specifications

Product #	Inlet Thread			
	in.	mm	lbs.	kg
295AF-0100	1 1/2"	38	6.40	2.90

Gov't. Nat'l. Stock #: 4930-01-293-4472
 295 Series Instruction Sheet Order Number: H09237PA